

HL SERIES / PRODUCT OVERVIEW

HL Slim-Width

LED WALL WASHERS

CRANE HL Slim-Width combines a 24 mm-wide housing with single-row optics for architectural facade lighting. Select the body height, mounting arrangement and light configuration to suit your installation.

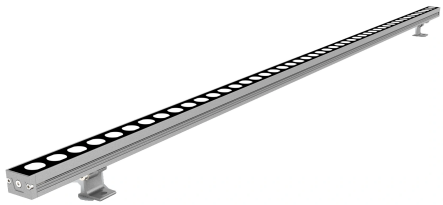

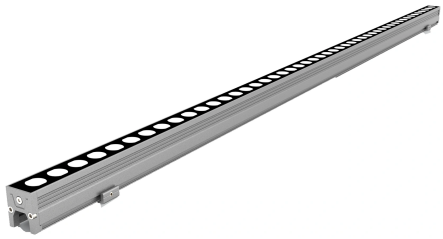

HL-XQ-2418

18 mm body height

HL-XQ-2430

30 mm body height

PRODUCT FEATURES

Slim architectural profile

24 mm-wide, 995 mm-long housings fit facade details where fixture space is limited.

Two mounting envelopes

Choose an 18 mm or 30 mm body height. Adjustable brackets are available on both models; HL-XQ-2430 also offers flat clips.

Multiple beam options

Single-row optics offer round and rectangular beam options. Custom beam angles are available to suit project requirements.

Outdoor construction

6063 aluminum alloy housing, 4 mm screen-printed glass with round apertures, and IP67 / IK10 protection ratings.

Light colour selection

White, RGB, RGBW and single-colour options. Specify a factory-selected white CCT from 2000-6500 K.

Low-voltage configuration

24 V DC input with DMX512 control. Standard power: 12 W or 15 W; custom power is available to suit project requirements.

APPLICATIONS Building facades, architectural ledges and recessed facade details.

HL SERIES / TECHNICAL SPECIFICATIONS

Technical specifications

Common specifications for HL-XQ-2418 and HL-XQ-2430.

Parameter	Specification / options
Input voltage	24 V DC
Rated power options	Standard: 12 / 15 W Custom options available on request.
Control	DMX512
Luminous efficacy[1]	81 lm/W
Light colour options	White (W) · RGB · RGBW · Single colour (specify when ordering)
White-light CCT[2]	2000-6500 K (customizable; specify the required CCT when ordering)
Optical arrangement	Single-row
Beam angle options	Standard: 20° · 30° · 60° · 10° × 45° · 15° × 50° · 20° × 60° Custom options available on request.
Ingress / impact rating	IP67 · IK10
Housing material	6063 aluminum alloy
Optical cover	4 mm screen-printed glass with round apertures
Warranty	5 years

MODEL COMPARISON

Specification	HL-XQ-2418	HL-XQ-2430
Body (L × W × H)	995 × 24 × 18 mm	995 × 24 × 30 mm
Installed height	43 mm	32 mm (flat clip); 55 mm (adjustable bracket)
Mounting options	Adjustable Bracket	Adjustable Bracket / flat clip
Kit weight[3]	1.48 kg	1.54 kg

[1] Luminous efficacy varies with light colour, power and optical configuration. Confirm the value for the selected configuration.

[2] Specify white CCT when ordering. Factory selection within 2000-6500 K; not on-site tunable white.


[3] Kit weight is not fixture net weight. Installed height includes the specified mounting assembly.

HL SERIES / DIMENSIONS & MOUNTING

Installation dimensions


All dimensions in mm. Drawings are not to scale. Allow for bracket clearance.

HL-XQ-2418 / ADJUSTABLE BRACKET

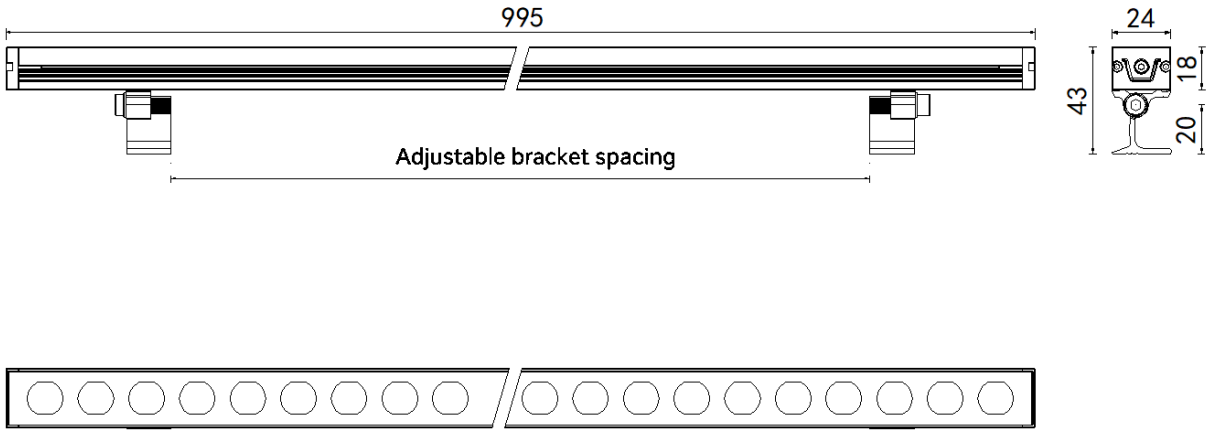

Body: 995 × 24 × 18 mm | Installed height: 43 mm

HL-XQ-2430 / FLAT CLIP OR ADJUSTABLE BRACKET

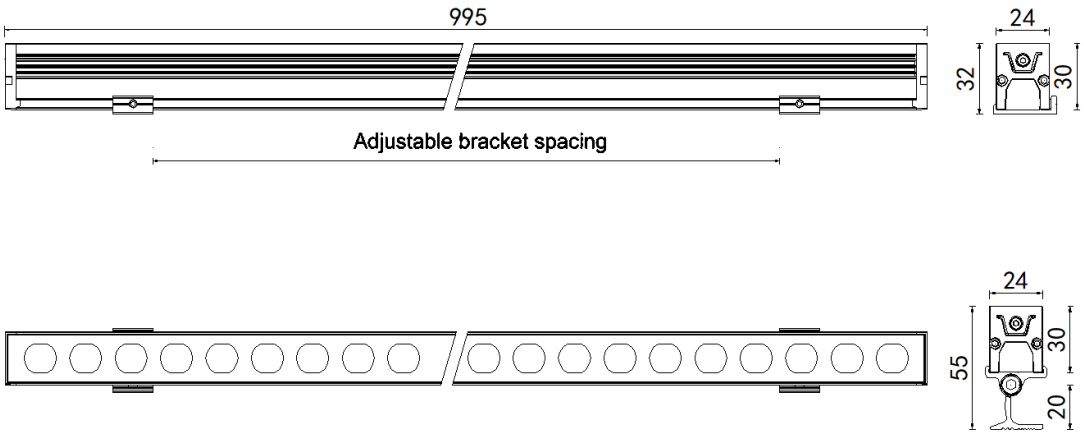

Body: 995 × 24 × 30 mm | Installed height: 32 mm (clip) / 55 mm (bracket)

TO SPECIFY: Model, power, beam angle, light colour / white CCT, mounting and quantity. Control: DMX512.
Custom power and beam angles are confirmed for each project. Share mounting clearance and cable routing.