LM SERIES / PRODUCT OVERVIEW

LM 60 Multi-Row

Linear architectural LED wall washers



LM-6032



LM-6032D

MODELS & POWER

Model	Power	Light shield	Housing weight
LM-6032	48 / 72 / 96 / 108 W	Without	4.02 kg
LM-6032D	48-72 W / 96 W	With	4.11 kg

The D profile has a side shield to screen the light source from oblique view.

LM-6032D: Confirm the required wattage when ordering.

LM SERIES / TECHNICAL DATA

Technical specifications

LM 60 Multi-Row

Parameter	Specification
Input voltage	24 V DC
Ingress protection	IP67
Impact resistance	IK10
Maximum efficacy	85 lm/W
Beam angles (reference)	11° / 17° / 29° / 58° / 14° × 38° / 18° × 37°
Light color	White / RGB / RGBW / Single color
White CCT (factory-set)	2200 / 2700 / 3000 / 3500 / 4000 / 5000 / 6000 K Other factory-set white CCT options within 2000-6500 K
Control	DMX512 / On/off / DALI
Operating temperature	-50 to +60 °C
Housing material	6063 aluminum alloy
Optical cover	4 mm tempered glass
Warranty	5 years

Custom beam angles are available on request.

LM SERIES / MECHANICAL DATA


Dimensions & mounting

LM 60 Multi-Row

LM-6032

Body dimensions (L × W × H)	**1000 × 60 × 32 mm**
Installed height	**91 mm**

END VIEW

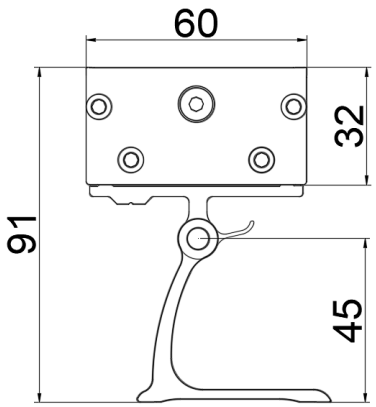

LM-6032D

Body dimensions (L × W × H)	**1000 × 60 × 58 mm**
Installed height	**117 mm**

END VIEW

