LM SERIES / PRODUCT OVERVIEW

LM Wide Lens

Linear architectural LED wall washers



LM-4533



LM-4533D



LM-5433



LM-5433D

MODELS & POWER

Model	Power	Light shield	Housing weight
LM-4533	48 / 72 / 60 W	Without	2.34 kg
LM-4533D	48 / 72 / 60 W	With	2.4 kg
LM-5433	48 / 60 / 72 W	Without	2.77 kg
LM-5433D	48 / 60 / 72 W	With	2.86 kg

The D profile has a side shield to screen the light source from oblique view.

LM SERIES / TECHNICAL DATA

Technical specifications

LM Wide Lens

Parameter	Specification
Input voltage	24 V DC
Ingress protection	IP67
Impact resistance	IK10
Maximum efficacy	85 lm/W
Beam angles	10° / 25° / 35° / 80° / 14° × 31° / 13° × 55° / 34° × 63° / 49° × 78°
Light color	White / RGB / RGBW / Single color
White CCT (factory-set)	2200 / 2700 / 3000 / 3500 / 4000 / 5000 / 6000 K Other factory-set white CCT options within 2000-6500 K
Control	DMX512 / On/off / DALI
Operating temperature	-50 to +60 °C
Housing material	6063 aluminum alloy
Optical cover	4 mm tempered glass
Warranty	5 years

Custom beam angles are available on request.

LM SERIES / MECHANICAL DATA


Dimensions & mounting

LM Wide Lens


LM-4533

Body dimensions (L × W × H)	**1000 × 45 × 33 mm**
Installed height	**75 ± 1 mm**

END VIEW

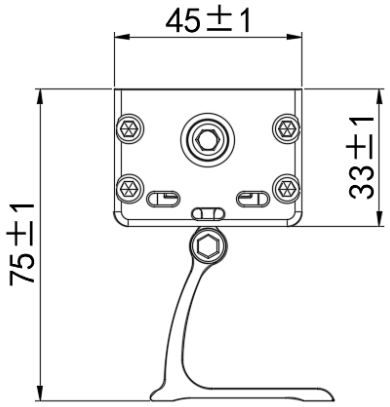


LENGTH & BRACKET LAYOUT

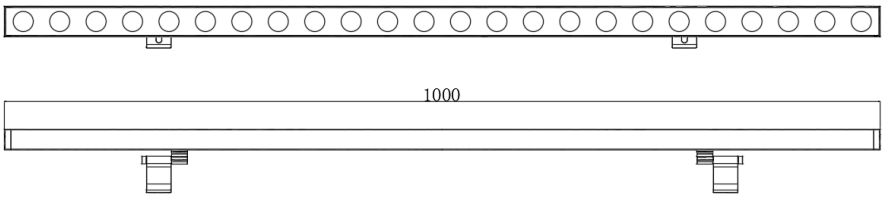


LM-4533D

Body dimensions (L × W × H)	**1000 × 45 × 55 mm**
Installed height	**97 ± 1 mm**

END VIEW

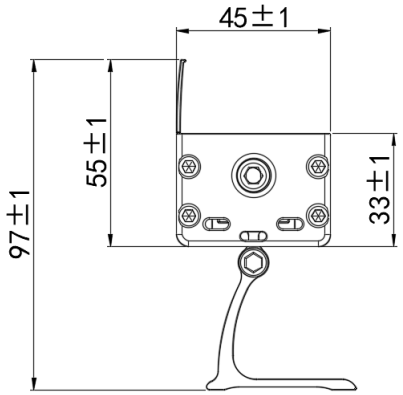

LENGTH & BRACKET LAYOUT

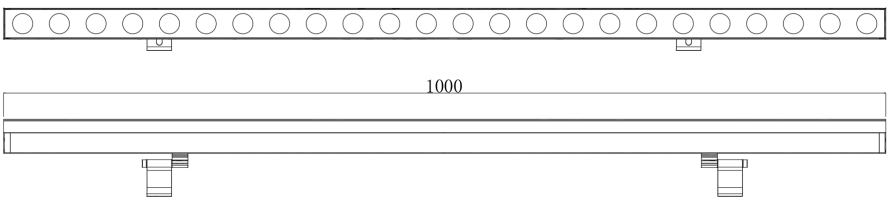

LM SERIES / MECHANICAL DATA


Dimensions & mounting

LM Wide Lens


LM-5433

Body dimensions (L × W × H)	**1000 × 54 × 33 mm**
Installed height	**91 mm**

END VIEW

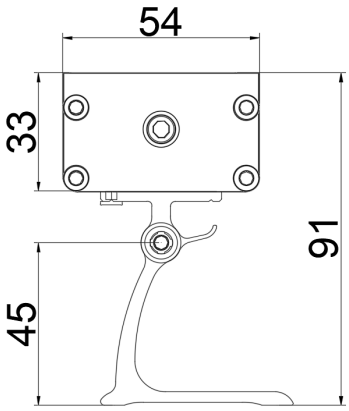


LENGTH & BRACKET LAYOUT

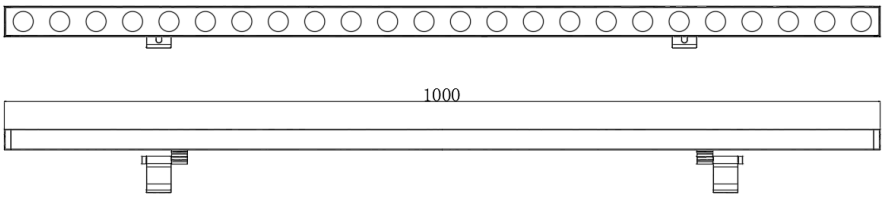

LM-5433D

Body dimensions (L × W × H)	**1000 × 54 × 62 mm**
Installed height	**121 mm**

END VIEW

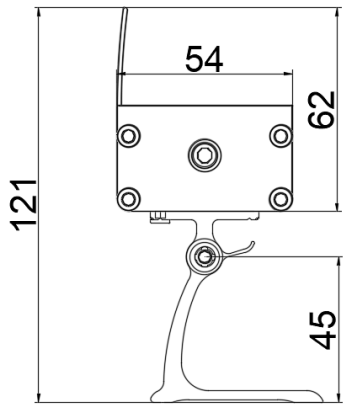

LENGTH & BRACKET LAYOUT

