P SERIES / PRODUCT OVERVIEW

P Single-Module

Rectangular architectural floodlights with a single lighting module.

CUSTOMIZABLE OPTIONS

Power · Light color · CCT · Beam angle · Housing color



W380P



W465P



W615P

MODEL COMPARISON

Model	Power range	Max. luminous flux	LED quantity	Dimensions
W380P	150-200 W	13,000 lm	65 pcs	W404 × D123 × H320 mm
W465P	200-240 W	17,280 lm	102 pcs	W490 × D129 × H351 mm
W615P	288-384 W	24,960 lm	96 pcs	W643 × D140 × H355 mm

Maximum luminous efficacy: 65 lm/W.

P SERIES / TECHNICAL DATA

Technical specifications

P Single-Module

Parameter	Specification
Beam angles	11° · 23° · 43° · 69° · 11° × 41° · 22° × 39°
CCT (white light)	2700-6000 K (factory-set; specify when ordering)
Light colors	White / Red / Green / Blue / Amber / RGB / RGBW
Control options	DMX512 · Wireless DMX · ON/OFF
Housing finish	Jet Black · Signal White · Anthracite Grey · White Aluminium · Custom colours on request
Materials	ADC12 aluminum alloy + weather-resistant silicone gasket + tempered glass
Input voltage	AC85-265V · 50-60Hz
Protection	IP66 / IK10
Operating temperature	-40 °C to +50 °C
Warranty	5 years
Service life	50,000 h


P SERIES / TECHNICAL DATA

Dimensions & mounting

P Single-Module


Dimensions in mm. Not to scale.

W380P

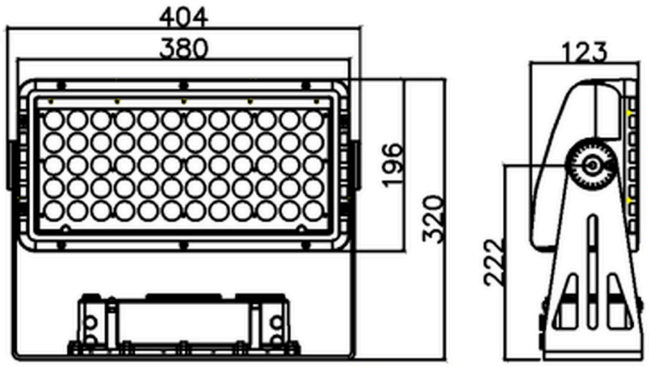


W404 × D123 × H320 mm

W465P

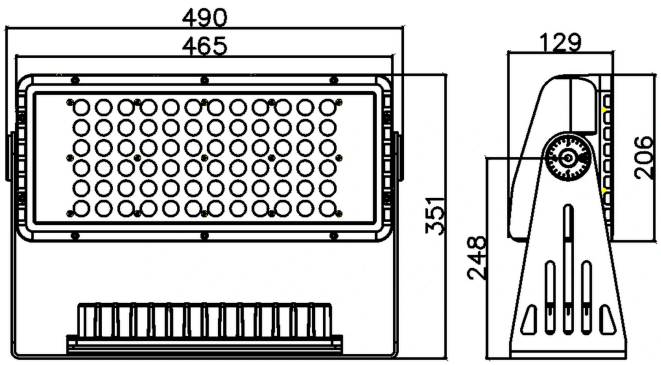

W490 × D129 × H351 mm

W615P

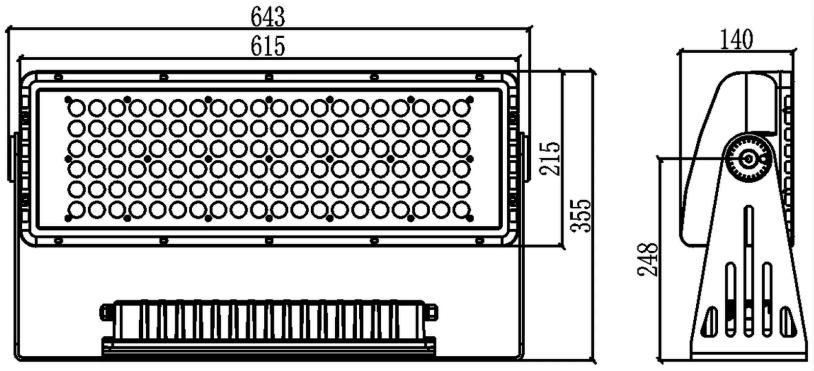

W643 × D140 × H355 mm