V SERIES / PRODUCT OVERVIEW

V Series

Round floodlights in four sizes, with adjustable U-brackets.

CUSTOMIZABLE OPTIONS

Power · Light color · CCT · Beam angle · Housing color



V260



V300



V370



V420

MODEL COMPARISON

Model	Power range	Max. luminous flux	LED quantity	Dimensions
V260	120-150 W	9,750 lm	24 pcs	Ø265 × D145 × H365 mm
V300	150-200 W	13,000 lm	24 pcs	Ø300 × D145 × H396 mm
V370	180-240 W	15,600 lm	36 pcs	Ø370 × D166 × H446 mm
V420	240-300 W	19,500 lm	48 pcs	Ø420 × D170 × H499 mm

Maximum luminous efficacy: 65 lm/W.

V SERIES / TECHNICAL DATA

Technical specifications

V Round Floodlights

Parameter	Specification
Beam angles	8° · 12° · 25° · 45° · 60° · 10° × 45° · 15° × 60°
CCT (white light)	2700-6000 K (factory-set; specify when ordering)
Light colors	White / Red / Green / Blue / Amber / RGB / RGBW
Control options	DMX512 · Wireless DMX · ON/OFF
Housing finish	Jet Black · Signal White · Anthracite Grey · White Aluminium · Custom colors on request
Materials	ADC12 aluminum alloy; weather-resistant silicone gasket; tempered glass
Input voltage	85-265 V AC, 50-60 Hz
Protection	IP66 / IK10
Operating temperature	-40 °C to +50 °C
Warranty	5 years
Service life	50,000 h


V SERIES / TECHNICAL DATA

Dimensions & mounting

V Round Floodlights


Dimensions in mm. Not to scale.

V260

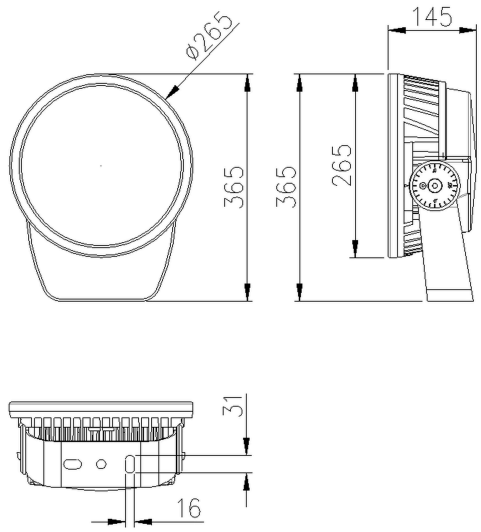


Ø265 × D145 × H365 mm

V300

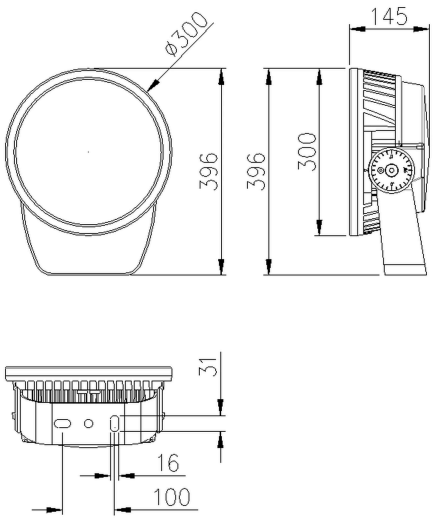


Ø300 × D145 × H396 mm

V370

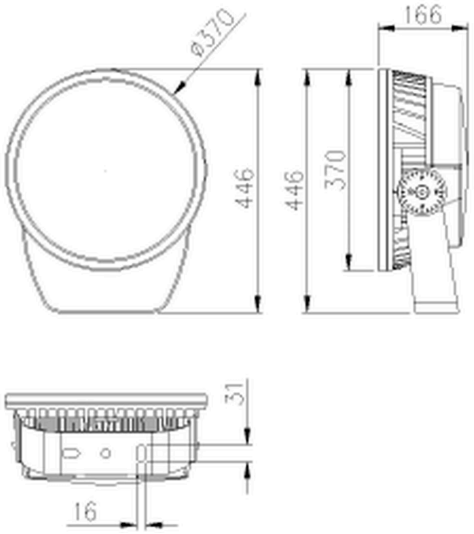

Ø370 × D166 × H446 mm

V420

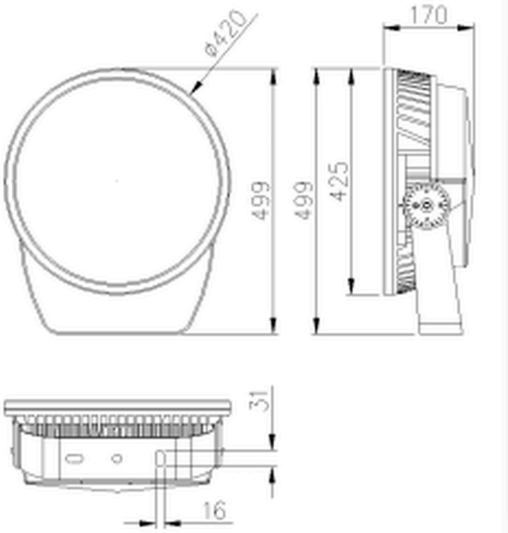

Ø420 × D170 × H499 mm