XY SERIES / PRODUCT OVERVIEW

XY Compact

Compact round floodlights with an adjustable U-bracket.

CUSTOMIZABLE OPTIONS

Power · Light color · CCT · Beam angle · Housing color



XYLSY-95



XYLSY-150



XYLSY-180

MODEL COMPARISON

Model	Power range	Max. luminous flux	LED quantity	Dimensions
XYLSY-95	10-15 W	975 lm	5 pcs	Ø95 × D90 × H130 mm
XYLSY-150	12-24 W	1,560 lm	12 pcs	Ø150 × D110 × H140 mm
XYLSY-180	18-36 W	2,340 lm	18 pcs	Ø180 × D120 × H165 mm

Maximum luminous efficacy: 65 lm/W.

Dimensions: without visor.

XY SERIES / TECHNICAL DATA

Technical specifications

XY Compact

Parameter	Specification
Beam angles	8° · 12° · 25° · 45° · 60° · 10° × 45° · 15° × 60°
CCT (white light)	2700-6000 K (factory-set; specify when ordering)
Light colors	White / Red / Green / Blue / Amber / RGB / RGBW
Control options	DMX512 · Wireless DMX · ON/OFF
Housing finish	Jet Black · Signal White · Anthracite Grey · White Aluminium · Custom colours on request
Materials	Die-cast ADC12
Input voltage	AC85-265V · 50-60Hz
Protection	IP66 / IK10
Operating temperature	-40 °C to +50 °C
Warranty	5 years
Service life	50,000 h

XY SERIES / TECHNICAL DATA

Dimensions & mounting


XY Compact

Dimensions in mm. Not to scale.


Visor for glare control and reduced spill light.

XYLSY-95

WITHOUT VISOR

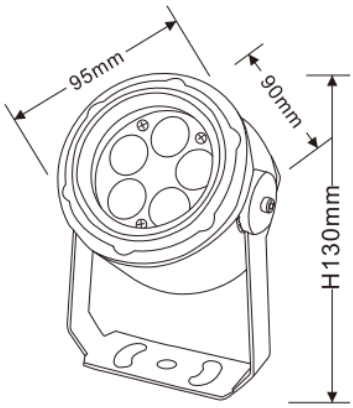


WITH VISOR

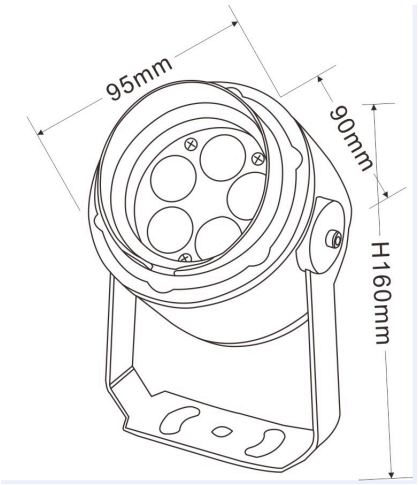


XYLSY-150

WITHOUT VISOR

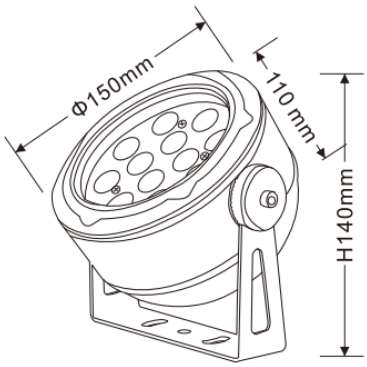


WITH VISOR

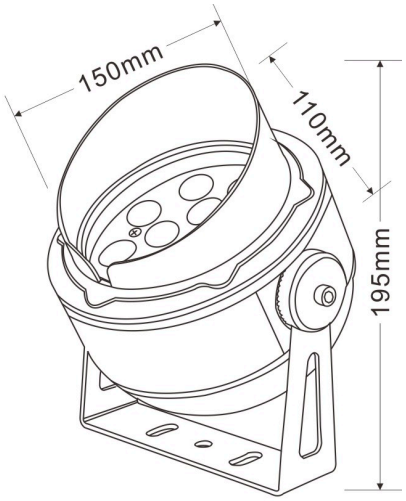

XYLSY-180

WITHOUT VISOR



WITH VISOR

